



Intermittent Flow Regimes in a Transonic Fan Airfoil Cascade

J. Lepicovsky
QSS Group, Inc., Cleveland, Ohio

E.R. McFarland and R.V. Chima
Glenn Research Center, Cleveland, Ohio

V.R. Capece and J. Hayden
University of Kentucky, Paducah, Kentucky

The NASA STI Program Office . . . in Profile

Since its founding, NASA has been dedicated to the advancement of aeronautics and space science. The NASA Scientific and Technical Information (STI) Program Office plays a key part in helping NASA maintain this important role.

The NASA STI Program Office is operated by Langley Research Center, the Lead Center for NASA's scientific and technical information. The NASA STI Program Office provides access to the NASA STI Database, the largest collection of aeronautical and space science STI in the world. The Program Office is also NASA's institutional mechanism for disseminating the results of its research and development activities. These results are published by NASA in the NASA STI Report Series, which includes the following report types:


- **TECHNICAL PUBLICATION.** Reports of completed research or a major significant phase of research that present the results of NASA programs and include extensive data or theoretical analysis. Includes compilations of significant scientific and technical data and information deemed to be of continuing reference value. NASA's counterpart of peer-reviewed formal professional papers but has less stringent limitations on manuscript length and extent of graphic presentations.
- **TECHNICAL MEMORANDUM.** Scientific and technical findings that are preliminary or of specialized interest, e.g., quick release reports, working papers, and bibliographies that contain minimal annotation. Does not contain extensive analysis.
- **CONTRACTOR REPORT.** Scientific and technical findings by NASA-sponsored contractors and grantees.

- **CONFERENCE PUBLICATION.** Collected papers from scientific and technical conferences, symposia, seminars, or other meetings sponsored or cosponsored by NASA.
- **SPECIAL PUBLICATION.** Scientific, technical, or historical information from NASA programs, projects, and missions, often concerned with subjects having substantial public interest.
- **TECHNICAL TRANSLATION.** English-language translations of foreign scientific and technical material pertinent to NASA's mission.

Specialized services that complement the STI Program Office's diverse offerings include creating custom thesauri, building customized data bases, organizing and publishing research results . . . even providing videos.

For more information about the NASA STI Program Office, see the following:

- Access the NASA STI Program Home Page at <http://www.sti.nasa.gov>
- E-mail your question via the Internet to help@sti.nasa.gov
- Fax your question to the NASA Access Help Desk at 301-621-0134
- Telephone the NASA Access Help Desk at 301-621-0390
- Write to:
NASA Access Help Desk
NASA Center for Aerospace Information
7121 Standard Drive
Hanover, MD 21076



Intermittent Flow Regimes in a Transonic Fan Airfoil Cascade

J. Lepicovsky
QSS Group, Inc., Cleveland, Ohio

E.R. McFarland and R.V. Chima
Glenn Research Center, Cleveland, Ohio

V.R. Capece and J. Hayden
University of Kentucky, Paducah, Kentucky

Prepared for the
Ninth International Symposium on Transport Phenomena
and Dynamics of Rotating Machinery
sponsored by the Pacific Center of Thermal Fluids Engineering
Honolulu, Hawaii, February 10–14, 2002

National Aeronautics and
Space Administration

Glenn Research Center

Acknowledgments

The work was sponsored by the NASA Glenn Research Center under the Smart Engine Components Project managed by Mr. R.D. Corrigan as a part of the R&T Base Propulsion and Power Program. The authors would like to thank Mrs. L. Shaw, chief of the GRC Compressor Branch, for her continuous support.

Available from

NASA Center for Aerospace Information
7121 Standard Drive
Hanover, MD 21076

National Technical Information Service
5285 Port Royal Road
Springfield, VA 22100

Available electronically at <http://gltrs.grc.nasa.gov/GLTRS>

INTERMITTENT FLOW REGIMES IN A TRANSONIC FAN AIRFOIL CASCADE

J. Lepicovsky
QSS Group, Inc.
Cleveland, Ohio 44135

E.R. Mc Farland and R.V. Chima
National Aeronautics and Space Administration
Glenn Research Center
Cleveland, Ohio 44135

V.R. Capece and J. Hayden
University of Kentucky
Paducah, Kentucky 42002

ABSTRACT

A study was conducted in the NASA Glenn Research Center linear cascade on the intermittent flow on the suction surface of an airfoil section from the tip region of a modern low aspect ratio fan blade. Experimental results revealed that, at a large incidence angle, a range of transonic inlet Mach numbers exist where the leading-edge shock-wave pattern was unstable. Flush mounted high frequency response pressure transducers indicated large local jumps in the pressure in the leading edge area, which generates large intermittent loading on the blade leading edge. These measurements suggest that for an inlet Mach number between 0.9 and 1.0 the flow is bi-stable, randomly switching between subsonic and supersonic flows. Hence, it appears that the change in overall flow conditions in the transonic region is based on the frequency of switching between two stable flow states rather than on the continuous increase of the flow velocity. To date, this flow behavior has only been observed in a linear transonic cascade. Further research is necessary to confirm this phenomenon occurs in actual transonic fans and is not the byproduct of an endwall restricted linear cascade.

INTRODUCTION

Modern turbofan engines employ a highly loaded, low-aspect ratio fan stage with transonic or low-supersonic velocities in the blade-tip region. The blade-tip airfoil sections are designed for precompression, with a concave suction surface just downstream of the leading edge (negative camber), and with very little overall camber. These airfoil sections have a sharp leading edge and are prone to flow separation at off-design conditions. Due to extreme flight envelope requirements military engines operate at part speed where the incidence angle is high and the blade-tip relative Mach number is high subsonic or transonic. These operating conditions make the fan blades susceptible to stall flutter. Blade flutter and associated high cycle fatigue problems are very detrimental to engine health and must be avoided. However, the origins of stall flutter are still not fully understood. Therefore, there has been a great deal of interest in fan blade stall flutter research in recent years.

The NASA-GRC linear oscillating cascade facility has undertaken an experimental program to further our understanding of stall flutter. While conducting experiments at transonic Mach numbers a flow behavior was found that may

contribute to the onset of blade flutter at transonic relative Mach numbers. This phenomenon manifested itself as an instability of the leading-edge shock-wave pattern, flow intermittency, at transonic inlet flows.

Until now these results have not been supported by direct measurements of local unsteady static pressures on the airfoil suction side at the blade leading edge. So far, the transonic airfoils, with very thin and sharp leading edges, have been instrumented with conventional static taps that are not capable of recording rapid pressure changes. Conventional static taps effectively average the fluctuating pressure, with the measured average value depending, to a large extent, on the particular configuration of the measurement system. Such data cannot reveal any intermittency of a transonic cascade flow. To substantiate the intermittent flow behavior in a transonic cascade, blades instrumented with miniature pressure transducers were used to measure the unsteady pressures on the airfoil suction side just downstream of the leading edge.

NOMENCLATURE

C	[mm]	Airfoil chord
$\frac{C}{C_p}$	[1]	Steady surface pressure coefficient, $(P(\xi) - \bar{P}_1)/(0.5\bar{\rho}_1\bar{V}_1^2)$
h	[mm]	Blade height
i_{FL}	[dg]	Flow incidence angle
i_{GM}	[dg]	Geometric incidence angle
Ma	[1]	Mach number
p_{av}	[kPa]	Average surface static pressure
p_x	[kPa]	Surface static pressure
S	[mm]	Blade pitch
x	[mm]	Axial distance in cascade frame
y	[mm]	Pitchwise distance in cascade frame
$\frac{y}{\Delta C_p}$	[1]	Steady surface pressure coefficient deviation from blade #5
γ	[dg]	Blade stagger angle (from axial direction)
π_{TB}	[1]	Cascade pressure ratio, \bar{P}_2/\bar{P}_1
ρ	[kg/m ³]	Air density
θ	[dg]	Blade camber
ξ	[mm]	Airfoil chordwise distance
σ_M	[1/s]	Rate of sonic crossings
σ_{px}	[kPa]	RMS of surface pressure

TEST FACILITY UPGRADE

NASA GRC operates a unique test facility dedicated to transonic cascade flutter research. The facility, NASA Transonic Flutter Cascade (TFC), has been described in detail in Refs. 1, 2, and 3. The facility is a linear cascade of nine blades. A view of the cascade test section is in Fig. 1. The airfoil and cascade parameters are given in Fig. 2 and Tab. 1 (Ref. 1, 4). Blades in the cascade can be oscillated to simulate blade flutter motion. For the present study, however, the blades were fixed and no forced oscillations of the blades took place. The blades were firmly clamped and there is no freedom for torsional movement. The uncertainty in the blade setting angle is 0.08 dg. Research of flutter phenomena in a linear cascade requires very good overall flow uniformity and, in particular, a high degree of flow periodicity over many blades.

The NASA TFC was recently modified and upgraded to improve the flow periodicity in the cascade. First, a numerical study was carried out to improve the periodicity of the tunnel, and to quantify better the inlet and exit conditions needed for accurate CFD predictions (Refs. 5, 6). Several configurations of the tunnel endwalls were investigated in order to improve the periodicity of the cascade. The configurations were designed using CFD analyses of the complete tunnel made by McFarland, and analyses of isolated blades made by Chima.

The PCSTAGE turbomachinery analysis panel code, developed by McFarland (Refs. 7, 8), was used to model the complete tunnel configuration, including all nine blades and the endwalls. The endwalls were modeled as a tenth body with one surface shaped like the left wall of the tunnel and the other surface shaped like the right wall. Calculations were made at $Ma = 0.5$ to minimize compressibility effects. Fig. 3 shows Mach number contours calculated for this configuration using PCSTAGE. The contours show very uniform flow ahead of the cascade.

The quasi-three-dimensional (Q-3-D) turbomachinery analysis code RVCQ3D developed by Chima (Ref. 9, 10) was used to analyze the blades. The code solves the thin-layer Navier-Stokes equations in finite-difference form. To improve the periodicity of the cascade, the endwall turning was adjusted to match the turning of a perfectly periodic cascade modeled by RVCQ3D. Figure 4 shows blade surface pressure distributions measured on blade B5 at inlet Mach numbers of 0.5, 0.8, and 1.0. Pressure distributions computed with RVCQ3D are also shown. Computed static pressure ratios across the cascade matched measured values closely, confirming that the endwall interference had been minimized.

BLADE LOADING PERIODICITY

Blade steady loading periodicity was verified by measuring surface pressures for all nine blade positions by marching the instrumented blades with conventional static pressure taps through the cascade. The tunnel operating conditions were repeatable to within 1% of the inlet Mach number for each blade position. To visualize the differences in loading diagrams between blades, the center blade (B5) was taken as a reference and compared to the other blades. The pressure distribution on blade B5 is shown in Fig. 4 for

$Ma = 0.8$. The differences between this reference pressure distribution and the pressure distributions on the other blades were computed, and are plotted in Fig. 5. The sketch at the top of the figure identifies individual blades with color-coded numbers. The two figures show the measured differences in pressure coefficients for the blade suction side, with the left and right sides of the cascade shown in the left and right plots, respectively. Blade B5 is represented by a straight black broken line. The deviation curves for the remaining blades are color coded in accordance with the blade numbers in the sketch. For a perfectly periodic flow, all deviation curves would collapse to the broken straight line of blade B5. Positive values of deviation indicate that a particular blade has a higher pressure coefficient than blade B5 at the same chordwise station. Negative values indicate a lower value than blade B5. All pressures in the cascade were measured using absolute pressure transducers with a range of 100 kPa, and accuracy better than $\pm 0.4\%$. This indicates an accuracy of ± 0.02 for the value of pressure coefficient. Therefore, deviations of pressure coefficient less than ± 0.04 are considered to be insignificant. Blades B2 through B5 in the left half of the cascade show excellent agreement of pressure distributions on the suction surface. Blades B5 through B7 in the right half show acceptable agreement in their suction side pressure distributions. Overall the cascade shows excellent periodicity over six blades, numbers B2 through B7. The high degree of blade loading periodicity boosted the confidence in the cascade data and its extrapolation to the transonic fan condition.

UNSTEADY FLOW IN TRANSONIC CASCADES

Available pressure data from a transonic airfoil, measured on the suction side in the leading edge region using conventional static taps, exhibit a smooth and continuous drop with increasing inlet Mach number. Such data indicates that the local flow velocity continuously increases from subsonic to low supersonic values. However, this contradicts the observations of unsteady and intermittent behavior of the flow shock pattern for transonic inlet flow conditions.

The sequence of photographs in Fig. 6 illustrates shock pattern development (Ref. 11). For the subsonic Mach numbers of 0.6 and 0.9 (Fig. 6a,b) there are no shocks present in the flow. The first appearance of shock waves in the flow occurs for the inlet flow Mach number of 1.01 (Fig. 6c). As seen here, the shock structure is not periodic; each blade shows a different shock pattern. Blades B4 and B5 generate simple normal shocks, whereas on blades B6 and B7 the shock structure appears to consist of an oblique shock followed by a bow shock. The location of the bow shock, particularly on blades B6 and B7, varies significantly. Direct observation of the shock structure for this inlet Mach number revealed that the shock structure was highly unstable and varied rapidly. Once the inlet Mach number was raised to 1.05, the shock structure noticeably stabilized and exhibited the pattern shown in Fig. 6d. The shock pattern appears to be periodic with a period equal to two blade pitches. Even blades (B4 and B6) generate normal shocks at 40% of the blade chord, whereas odd blades (B5 and B7) clearly show a horizontally located oblique (lip) shock attached to the blade leading edge and a normal shock (bow) at 25% of the blade

chord. For the inlet Mach numbers of 1.12 and higher (Fig. 6e,f,g) the shock structure is highly periodic with the period of one blade pitch.

Surface flow visualization using an oil-paint mixture clearly shows that there are different flow patterns for subsonic and supersonic inlet Mach numbers. Four surface flow patterns are shown in Fig. 7 for inlet Mach numbers of 0.5, 0.8, 1.0, and 1.18. For the subsonic inlet Mach numbers there is a large separated flow region on the blade suction surface just past the leading edge exhibiting a complex three-dimensional flow structure. For the supersonic inlet flow, however, the flow past the leading edge is fully attached to the blade for a considerable length. This abrupt change of surface flow patterns is also not indicative of a smooth velocity increase through the transonic flow region.

UNSTEADY SURFACE PRESSURES

Three blades with instrumentation on the suction surface were used in this study. One blade had 15 conventional static pressure taps along the midspan line, and two blades had 15 miniature high-frequency pressure transducers (Kulite XCQ-062-15A) with a nominal range of 0 to 100 kPa absolute. Details of the blade instrumentation and data acquisition procedures can be found in Ref. 12. Only data from port 1 located at the blade midspan 6.0% of the blade chord downstream of the blade leading edge are presented here. The instrumented blades were marched through the cascade to record pressures for various blade positions in the cascade. Data for blade positions 3, 4, 6, and 7 will be presented.

First, the recorded pressure time histories from the unsteady pressure transducer were averaged and compared with conventional static pressure tap data for each of the investigated positions. Fig. 8 presents comparisons of static tap data and averaged unsteady data in the form of pressure coefficient versus inlet Mach number. As seen here, there is relatively good agreement between these sets of data. The differences are not larger than those presented previously in Fig. 5. Unsteady measurements allow quantification of pressure fluctuations (root-mean-square values) as a function of the inlet Mach number. This is shown in Fig. 9a,b, where comparison of absolute pressure levels is plotted in upper diagrams and levels of pressure fluctuations are plotted in lower diagrams. There are no noticeable differences among investigated blades. The fluctuation levels are shown in pressure units. In relative terms, the level of pressure fluctuation is about 1% of the average pressure value up to the inlet Mach number of 0.5, but then increases to a level of 18 to 20% for the inlet Mach number equal to 1.0. Then the fluctuation level abruptly drops to 2% and stays at this level up to the maximum Mach number tested ($Ma = 1.1$).

A series of time resolved pressure signals is presented in Fig. 10a,b,c. The series is for a range of inlet Mach numbers from 0.5 to 1.02. As seen here, unsteadiness of the pressure signals rapidly increases with increasing inlet Mach number up to $Ma = 0.93$. At this inlet Mach number a new phenomenon takes place. Starting at this Mach number there are momentary pressure level drops to a level for which the flow velocity jumps

to a supersonic value. It should be emphasized here that the changes are not smooth and gradual transitions, but sudden pressure jumps. These bursts of supersonic velocity are at first very short (a few milliseconds) and infrequent. However, with increasing inlet Mach number the duration and number of appearances of supersonic flow velocities increases dramatically. For an inlet Mach number of about 0.95 to 0.97, the local flow velocity at the blade leading edge is supersonic half of the time. However, it appears that the velocity is still switching randomly. As the Mach number increases further, the regions of supersonic flow velocity rapidly lengthen with very sporadic instances of subsonic velocity pockets. Finally, for inlet Mach numbers of 1.01 the pressure level has settled at a value of about 20 kPa, which corresponds to established continuous supersonic flow.

FLOW INTERMITTENCE

The jumps in the local pressure level in the blade leading edge region are about 20 to 25 kPa for the Mach number range from 0.9 to 1.0. It appears that the flow just past the leading edge is bi-stable, randomly switching between the subsonic and supersonic flows. To reveal the bi-stable character of the flow, a threshold was set for the midlevel of pressure drops (27 kPa in this particular case), and the measured pressure was averaged for segments of pressure level above this threshold and segments below the threshold. The results are presented in Fig. 11a,b. The upper diagrams show comparison of static tap data and overall averages of unsteady data. The lower diagrams show three distributions: static tap data, averaged unsteady data for subsonic flow, and averaged data for supersonic flow. As seen here, a smooth pressure drop in this region measured by the conventional static taps is an artifact of the averaging process of this pressure measuring method. It appears that in reality the change in overall flow conditions in the transonic flow region is based on the frequency of switching between two stable flow states rather than on the continuous increase of the flow velocity.

A flow intermittence function for any inlet Mach number that indicates flow stability in the region of bi-stable switching between high subsonic and low supersonic local velocities can be defined. It can be viewed as a time fraction of flow being at supersonic velocities in the bi-stable region. It has a value of 0 for flow that is fully subsonic and a value of 1 (100%) for flow that is fully supersonic. Fig. 12a,b presents this function for the investigated four blades. The lower diagrams in the same figure show the rate of sonic crossings per second for the bi-stable region. The rate of sonic crossings is actually the rate of pressure jumps. Therefore, it is the rate of unsteadiness in blade loading (blade forcing function). If this rate is close to any of the blade natural frequencies, blade oscillations will be excited. It appears from the data presented that the inner blades exhibit a lower rate of zero crossings than the blades closer to the cascade endwalls. In other words, it depends on the blade position in the cascade. This may indicate that the phenomenon of flow intermittency is somehow associated with the linear cascade flow conditions. At present, this observation is purely speculative, based on this single data set, and needs to be confirmed with data from other facilities.

CONCLUDING REMARKS

The phenomenon of flow intermittency in a transonic cascade for high-speed subsonic inlet Mach numbers with high incidence has not been previously reported in the open literature. Flow appears to be bi-stable for these conditions. Pressure jumping between two levels in the transonic region generates large intermittent loading on the blade leading edge region and can lead to the onset of blade vibration. To date, this flow behavior has only been observed in a linear transonic cascade. Based on these observations the following question arises: Can this new model of the flow physics, devised from linear transonic fan blade cascade data, be applied to an annular transonic cascade or even to an actual transonic fan? No data from annular cascades or transonic fans has been reported to confirm it or disprove it. In other words, does this phenomenon occur in actual transonic fans or is this only a byproduct of an endwall restricted linear cascade? At present, this question cannot be answered decisively. In either case, this finding will affect future research on transonic blading. If the flow intermittence observed is a general phenomenon, then it will impact computational methods for transonic fans, in particular, blade life prediction codes that are not yet fully reliable. If this phenomenon is restricted only to linear transonic cascades, then any linear cascade data for high subsonic and sonic inlet Mach numbers must be treated with utmost caution. Consequently, future research on transonic blading should be conducted in annular cascades.

REFERENCES

1. Buffum, D.H., Capece, V.R., King, A.J., and El-Aini, Y.M.: "Oscillating Cascade Aerodynamics at Large Mean Incidence," ASME Paper 96-GT-339.
2. Boldman, D.R. and Buggele, A.E.: "Wind Tunnel Tests of a Blade Subjected to Midchord Torsional Oscillations at High Subsonic Stall Flutter Conditions," NASA TM-78998, 1978.
3. Shaw, L.M., Boldman, D.R., Buggele, A.E., and Buffum, D.H.: "Unsteady Pressure Measurements on a Biconvex Airfoil in a Transonic Oscillating Cascade," *Journal of Engineering for Gas Turbines and Power*, Vol. 108, pp. 53-59, 1986.
4. Lepicovsky, J., McFarland, E.R., Chima, R.V., and Wood, J.R.: "On Flowfield Periodicity in the NASA Transonic Flutter Cascade, Part I - Experimental Study," ASME Paper 2000-GT-0572, 2000.
5. Chima, R.V., McFarland, E.R., Wood, J.R., and Lepicovsky, J.: "On Flowfield Periodicity in the NASA Transonic Flutter Cascade, Part II - Numerical Study," ASME Paper 2000-GT-0573, 2000.
6. Lepicovsky, J., McFarland, E.R., Chima, R.V., and Wood, J.R.: "On Flowfield Periodicity in the NASA Transonic Flutter Cascade," *Journal of Turbomachinery*, Vol. 123, pp. 501-509, 2001.
7. McFarland, E.R.: "An Integral Equation Solution for Multistage Turbomachinery Design Calculations," ASME paper 93-GT-41, 1993.

8. McFarland E.R.: "Use of Preliminary Design Methods in the Analysis of Multi-Stage Turbomachinery," NASA CP-3282, Vol. 2, 1994.
9. Chima, R.V.: "Explicit Multigrid Algorithm for Quasi-Three-Dimensional Viscous Flows in Turbomachinery," *AIAA J. Propulsion and Power*, Vol. 3, No. 5, pp. 397-405, 1987.
10. Chima, R.V.: "A $k-\omega$ Turbulence Model for Quasi-Three-Dimensional Turbomachinery Flows," AIAA Paper 96-0248, also NASA TM-107051, 1995.
11. Lepicovsky, J., Chima, R.V., Jett, T.A., Bencic, T.J., and Weiland, K.E.: "Investigation of Flow Separation in a Transonic-Fan Linear Cascade Using Visualization Methods," International Symposium on Flow Visualization, Paper 335, 2000.
12. Lepicovsky, J., McFarland, E.R., Capece, V.R., Jett, T.A., and Senyitko, R.G.: "Methodology of Blade Unsteady Pressure Measurement in the NASA Transonic Flutter Cascade," to be published.

Table 1. Airfoil and cascade parameters.

Blade chord, C	89.2mm
Leading edge camber angle, θ	-9.5 dg
Maximum thickness, t_{max}	0.048 C
Location of maximum thickness, ξ_{max}	0.625 C
Stagger angle, γ	60.0 dg
Number of blades in the cascade	9
Blade pitch, S	58.4 mm
Cascade solidity, C/S	1.53
Pitching axis, ξ_{pitch}	0.5 C
Blade height, h	95.9 mm

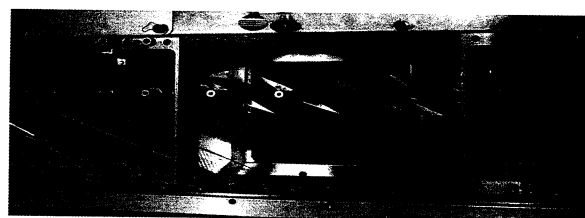


Figure 1. Test section of the NASA Transonic Flutter Cascade.

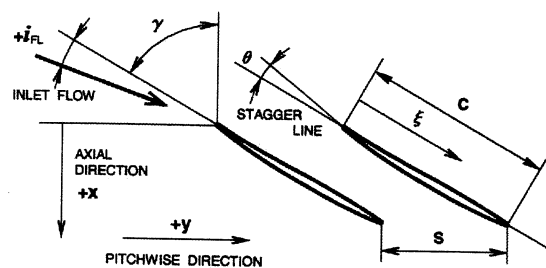


Figure 2. Airfoil and cascade coordinate system.

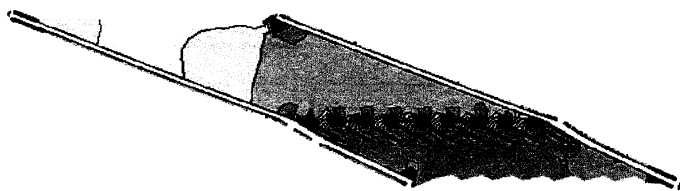


Figure 3. Mach number contours computed with PCSTAGE for final cascade configuration.

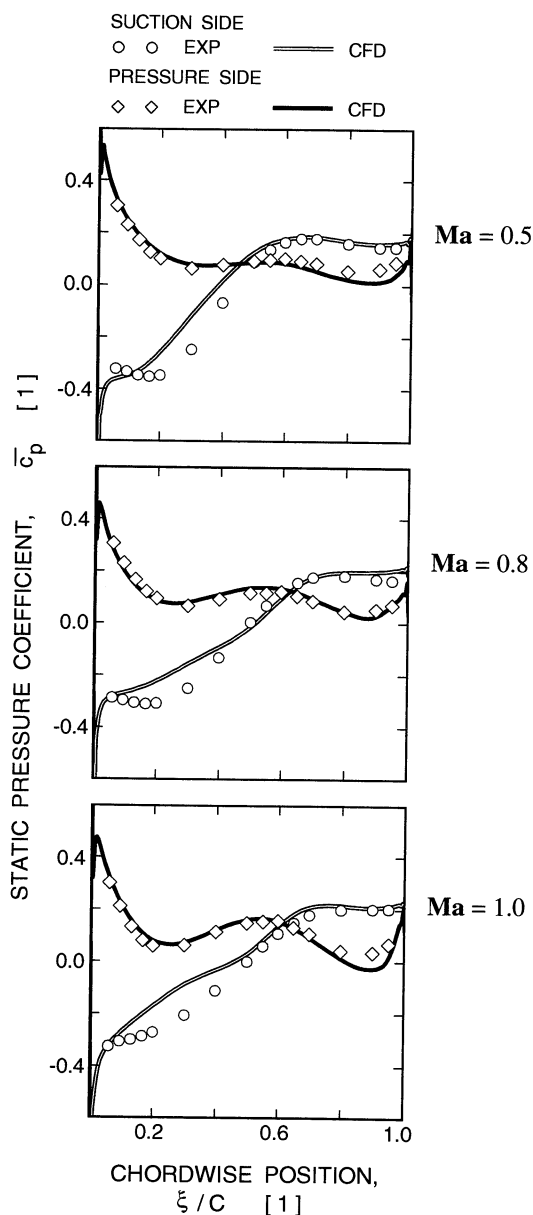


Figure 4. Computed and measured blade loading diagrams for middle blade (B5).

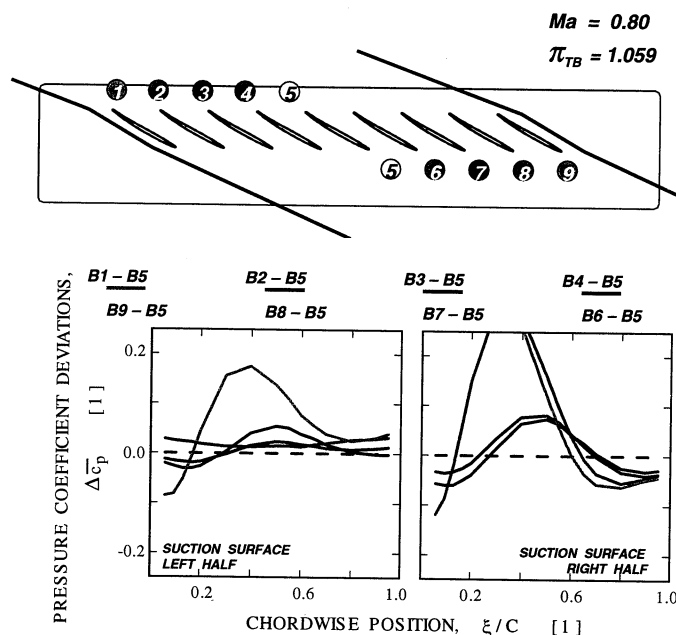


Figure 5. Measured blade loading periodicity.

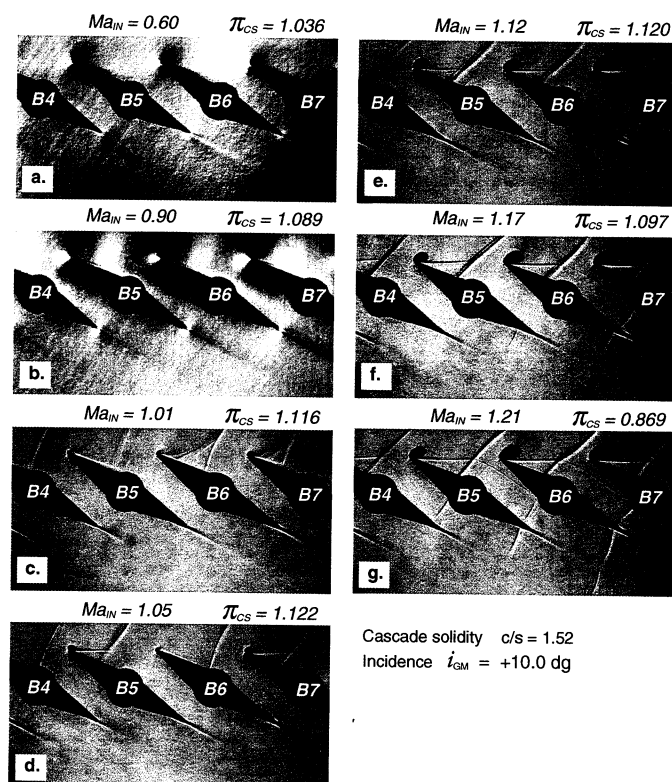


Figure 6. Shadowgraph visualization of shock wave pattern.

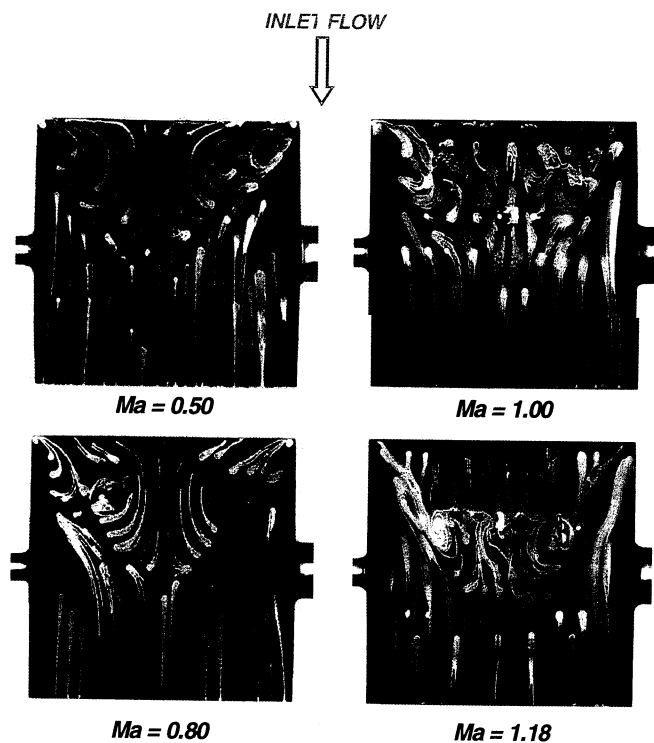


Figure 7. Visualized surface flow patterns.

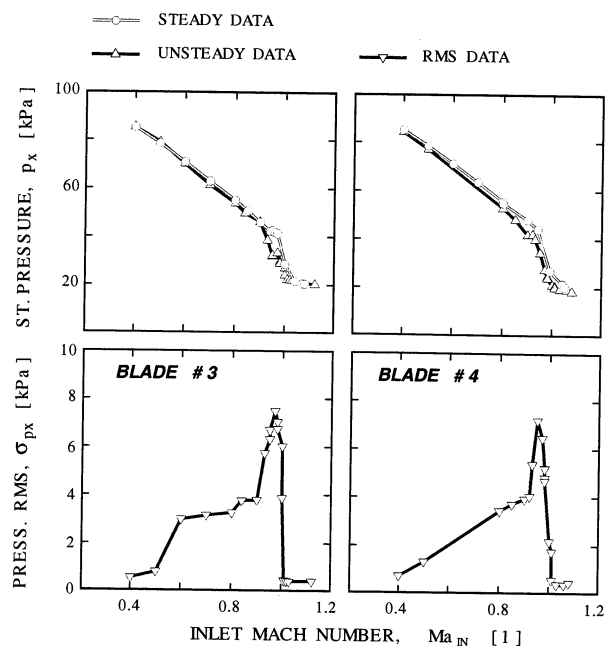


Figure 9a. Local surface pressure and pressure unsteadiness as a function of Mach number.

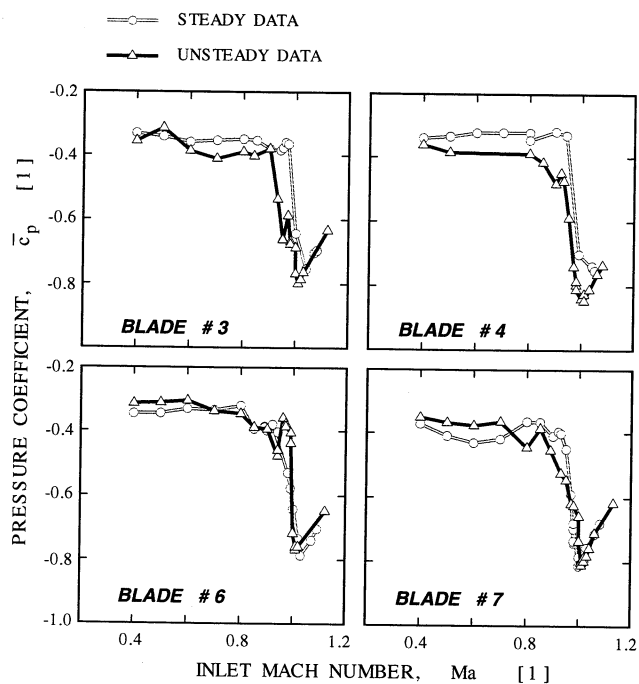


Figure 8. Pressure coefficient as a function of inlet Mach number.

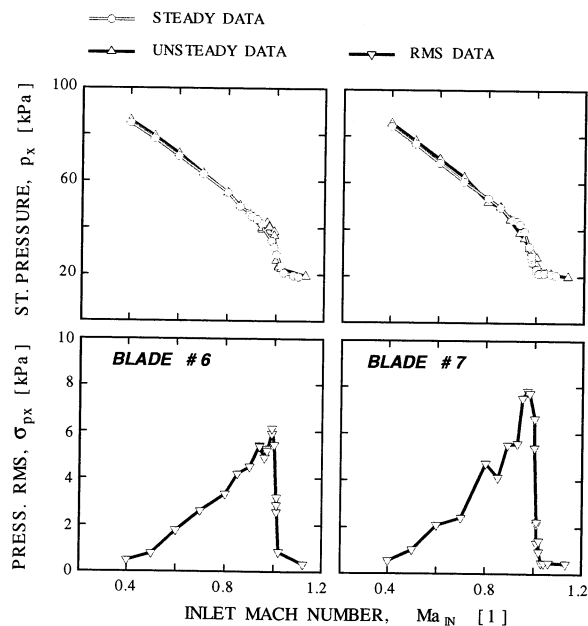


Figure 9b. Local surface pressure and pressure unsteadiness as a function of Mach number.

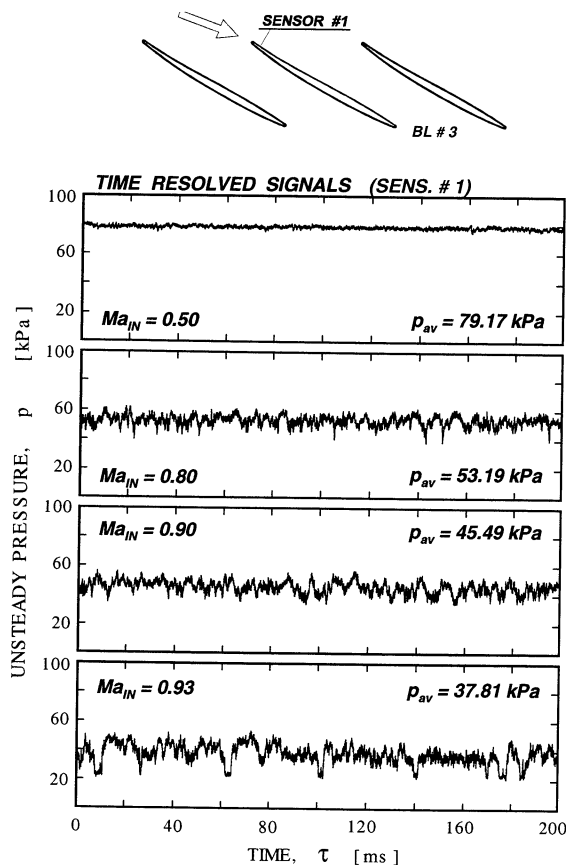


Figure 10a. Time resolved pressure signal at Port 1 for different inlet Mach numbers.

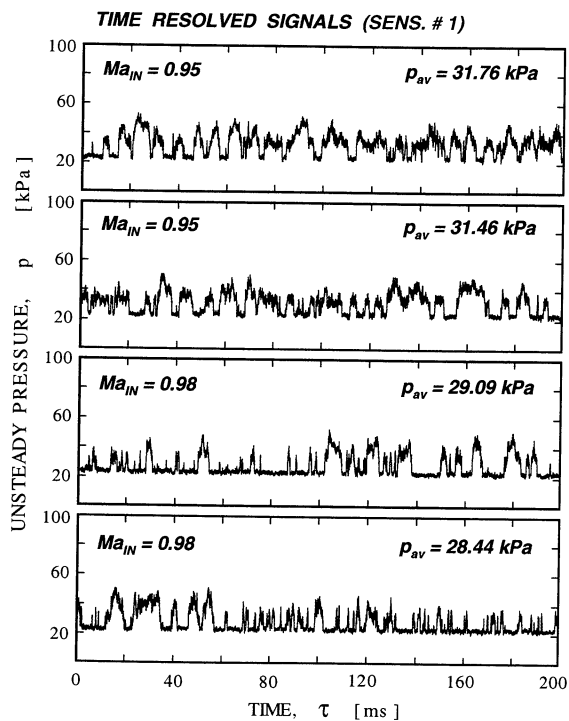


Figure 10b. Time resolved pressure signal at Port 1 for different inlet Mach numbers.

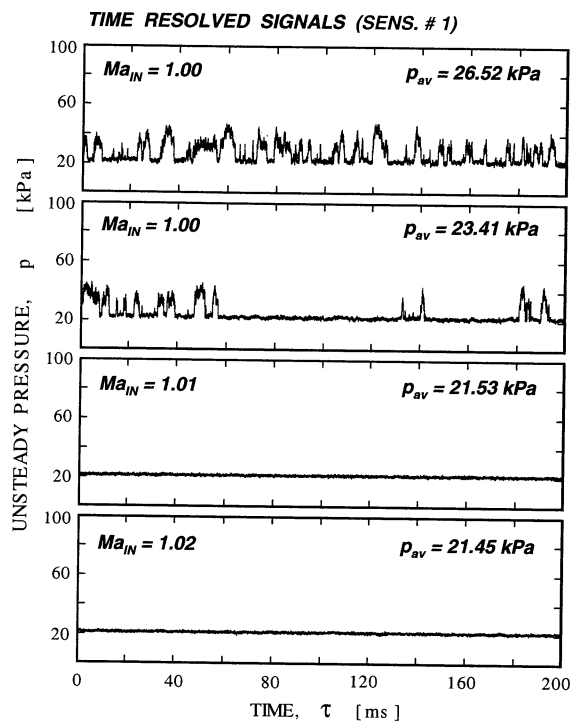


Figure 10c. Time resolved pressure signal at Port 1 for different inlet Mach numbers.

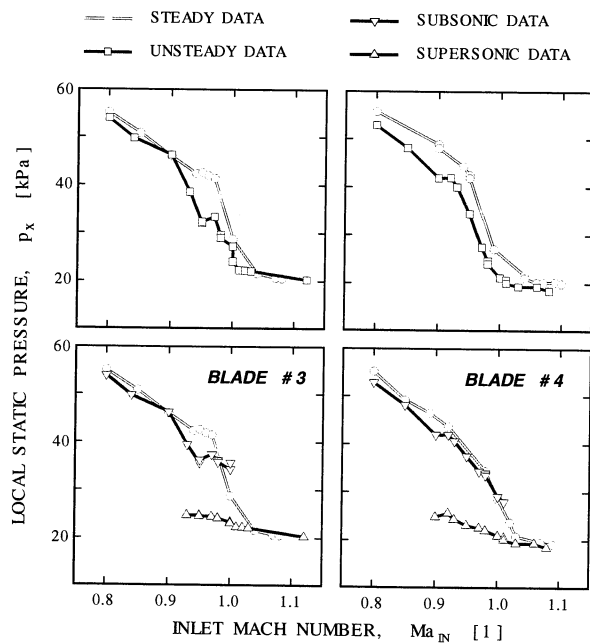


Figure 11a. Pressure distributions for subsonic and supersonic intermittent flows.

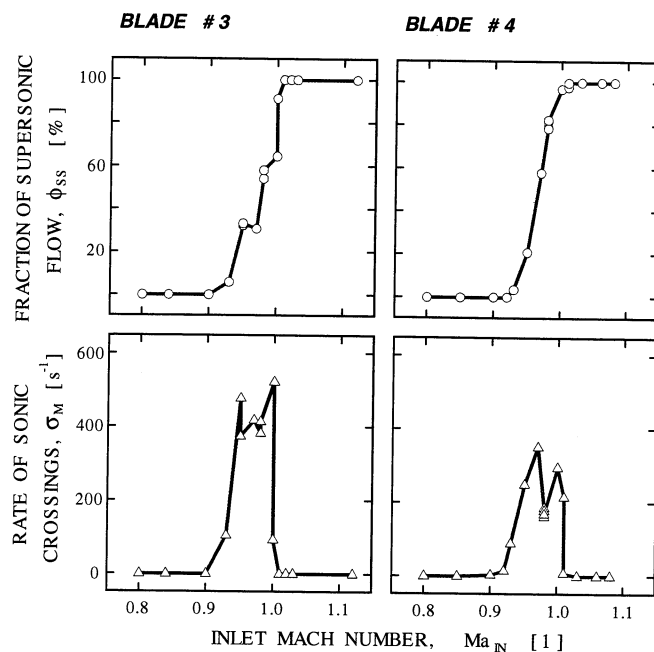


Figure 12a. Intermittency parameters for blades B3 and B4.

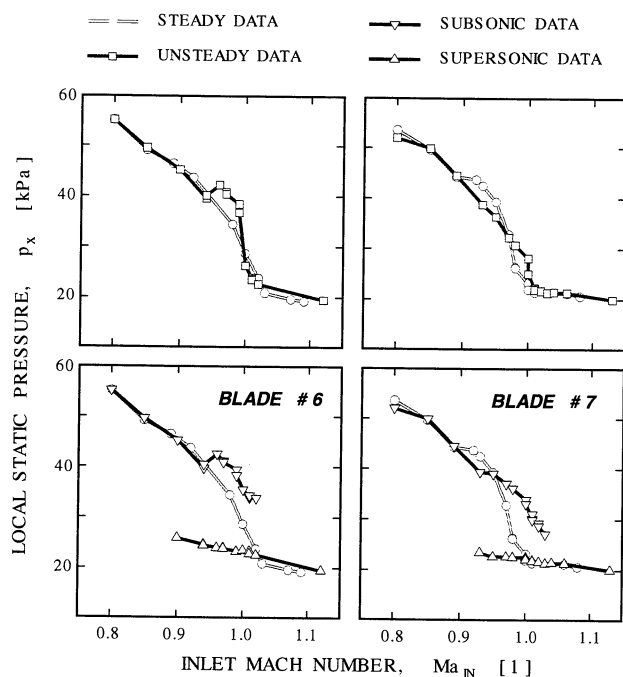


Figure 11b. Pressure distributions for subsonic and supersonic intermittent flows.

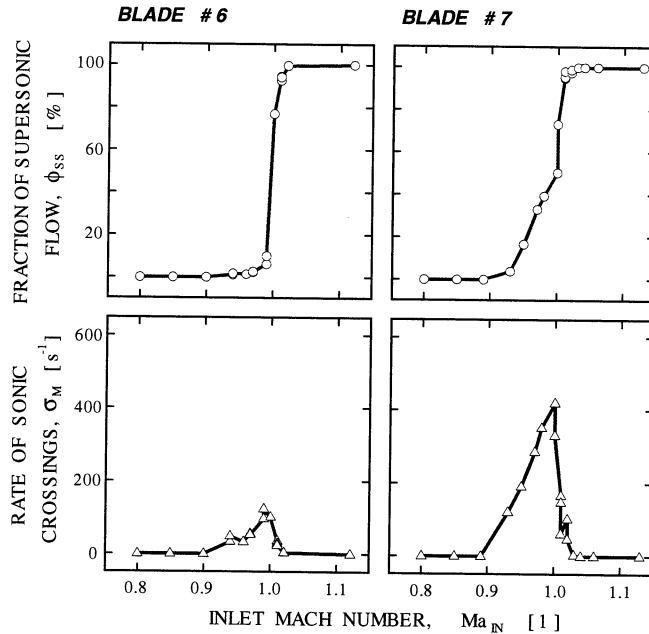


Figure 12b. Intermittency parameters for blades B6 and B7.

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)

2. REPORT DATE
February 2002

3. REPORT TYPE AND DATES COVERED
Technical Memorandum

4. TITLE AND SUBTITLE

Intermittent Flow Regimes in a Transonic Fan Airfoil Cascade

5. FUNDING NUMBERS

WU-708-28-13-00

6. AUTHOR(S)

J. Lepicovsky, E.R. McFarland, R.V. Chima, V.R. Capece, and J. Hayden

7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)

National Aeronautics and Space Administration
John H. Glenn Research Center at Lewis Field
Cleveland, Ohio 44135-3191

8. PERFORMING ORGANIZATION
REPORT NUMBER

E-13199

9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)

National Aeronautics and Space Administration
Washington, DC 20546-0001

10. SPONSORING/MONITORING
AGENCY REPORT NUMBER

NASA TM-2002-211375

11. SUPPLEMENTARY NOTES

Prepared for the Ninth International Symposium on Transport Phenomena and Dynamics of Rotating Machinery sponsored by the Pacific Center of Thermal Fluids Engineering, Honolulu, Hawaii, February 10-14, 2002. J. Lepicovsky, QSS Group, Inc., Cleveland, Ohio; E.R. McFarland and R.V. Chima, NASA Glenn Research Center; V.R. Capece and J. Hayden, University of Kentucky, Paducah, Kentucky. Responsible person, J. Lepicovsky, organization code 5810, 216-433-1402.

12a. DISTRIBUTION/AVAILABILITY STATEMENT

Unclassified - Unlimited

Subject Category: 07

Distribution: Nonstandard

Available electronically at <http://gltrs.grc.nasa.gov/GLTRS>

This publication is available from the NASA Center for AeroSpace Information, 301-621-0390.

12b. DISTRIBUTION CODE

13. ABSTRACT (Maximum 200 words)

A study was conducted in the NASA Glenn Research Center linear cascade on the intermittent flow on the suction surface of an airfoil section from the tip region of a modern low aspect ratio fan blade. Experimental results revealed that, at a large incidence angle, a range of transonic inlet Mach numbers exist where the leading-edge shock-wave pattern was unstable. Flush mounted high frequency response pressure transducers indicated large local jumps in the pressure in the leading edge area, which generates large intermittent loading on the blade leading edge. These measurements suggest that for an inlet Mach number between 0.9 and 1.0 the flow is bi-stable, randomly switching between subsonic and supersonic flows. Hence, it appears that the change in overall flow conditions in the transonic region is based on the frequency of switching between two stable flow states rather than on the continuous increase of the flow velocity. To date, this flow behavior has only been observed in a linear transonic cascade. Further research is necessary to confirm this phenomenon occurs in actual transonic fans and is not the byproduct of an endwall restricted linear cascade.

14. SUBJECT TERMS

Study; Intermittent flow; Suction surface; Airfoil

15. NUMBER OF PAGES

14

16. PRICE CODE

17. SECURITY CLASSIFICATION
OF REPORT

Unclassified

18. SECURITY CLASSIFICATION
OF THIS PAGE

Unclassified

19. SECURITY CLASSIFICATION
OF ABSTRACT

Unclassified

20. LIMITATION OF ABSTRACT